



<b>General</b>		
Shape	Free form / Triangle	
Seating Capacity	2	
Shell Material	Ultralife™ / Geloy®	
Dimensions	91½" x 91½" x 40" H / (233cm X 233cm x 102cm H)	
Corner Radii	22" (56 cm)	
Water Capacity	225 Gallons (851 Liters)	
Dry Weight	835 lbs (378 kg)	
Shipping Weight	Domestic 835 lbs (378 kg) - Export 885 lbs (416 kg)	
Full Weight	2709 lbs (1229 kg)	
Skirt Material	Synthetic	
Poly Floor	Yes	
<b>Water System</b>		
Water Treatment System	UltraPure® PLUS	
Plumbing Systems	3	
Filters/Coverage	2 / 75 sq. ft.	
Gate Valves	4	
VCR Jet® - Air Adjustable/Directional	0	
VCR Jet® - Rotator	4	
VCR Jet® - Dual Rotator	2	
VCR Jet® - Multi Port Spinner	0	
VCR Jet® - Mini Rotator	18	
VCR Jet® - Mini Directional	4	
VCR Jet® - Euro Directional	0	
VCR Jet® - Euro Rotator	8	
VCR Jet® - Mini Directional in NFJ	8	
Typhoon Jet	0	
Ozone Jet	1	
Heater Return Jet	1	
Pump Returns	4	
Diverter Valves	1	
Floor Drains	1	
Skimmer	8" Weir	
<b>Special Features</b>		
Dynamic Massage Sequencer w/ control panel	Yes	
NeckFlex® Jet Pillows	2	
Headrest Pillows	0	
Stereo system	Optional Poly-Planar	
Water Feature	Yes	
Water Feature Volume control	Yes	
Cup Holders	2	
Tactile Therapy	Floor pedestal	
Under water magnetic switch	Yes	
Air Control Valve	Yes	
<b>Pump Information</b>		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Motor Size – Peak (Continuous) HP	4.0 (2.5) HP & 3.6 (2.0) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One / Dual & One / Single	One / Dual & One / Single
Circulation pump	1	1
Fountain pump	1	1
<b>Electrical System</b>		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Voltage	240	240
Amperage	50/40/30	2X16 / 1X32 / 3X16
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.1, 3.3, 5.2 kW
Thermostat	Electronic	Electronic
Light	2 Multi color LED	2 Multi color LED
Control System	MSPA-MP-D16	MSPA-MP-D14-CE
Upper Control (programmable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	No	No

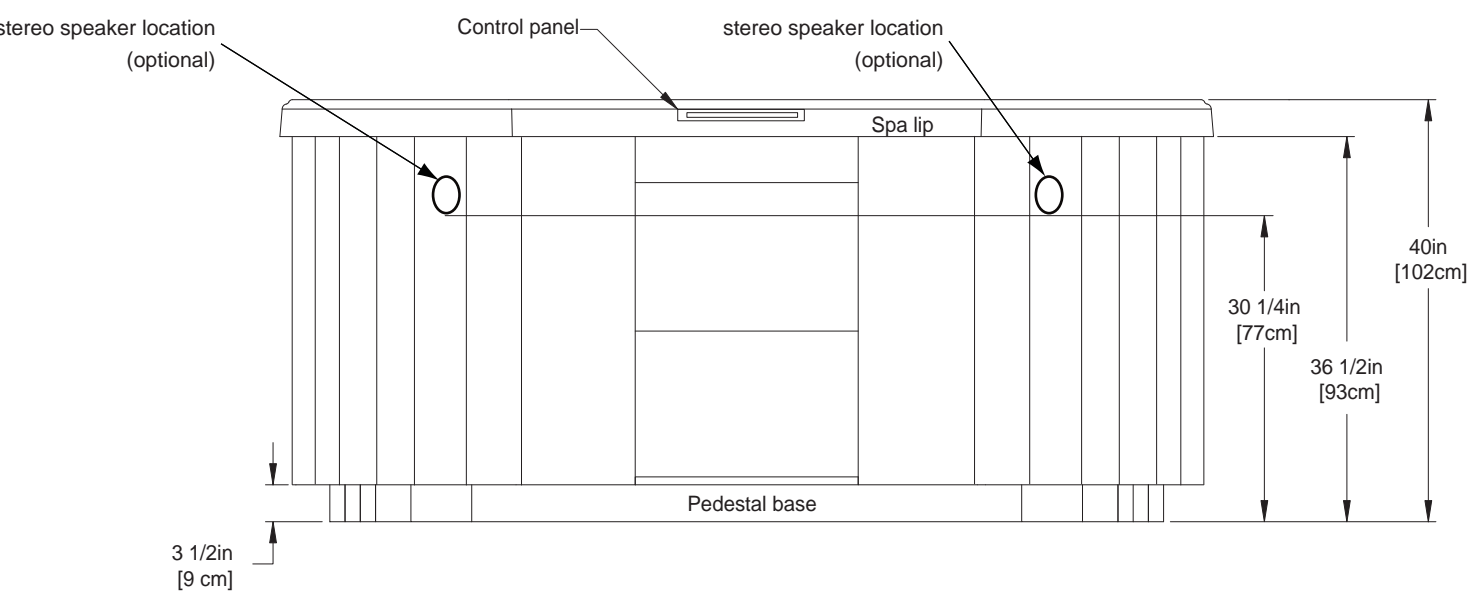

Note: 1. Subject to change without notice.

# Dupree Bay Architectural Specifications

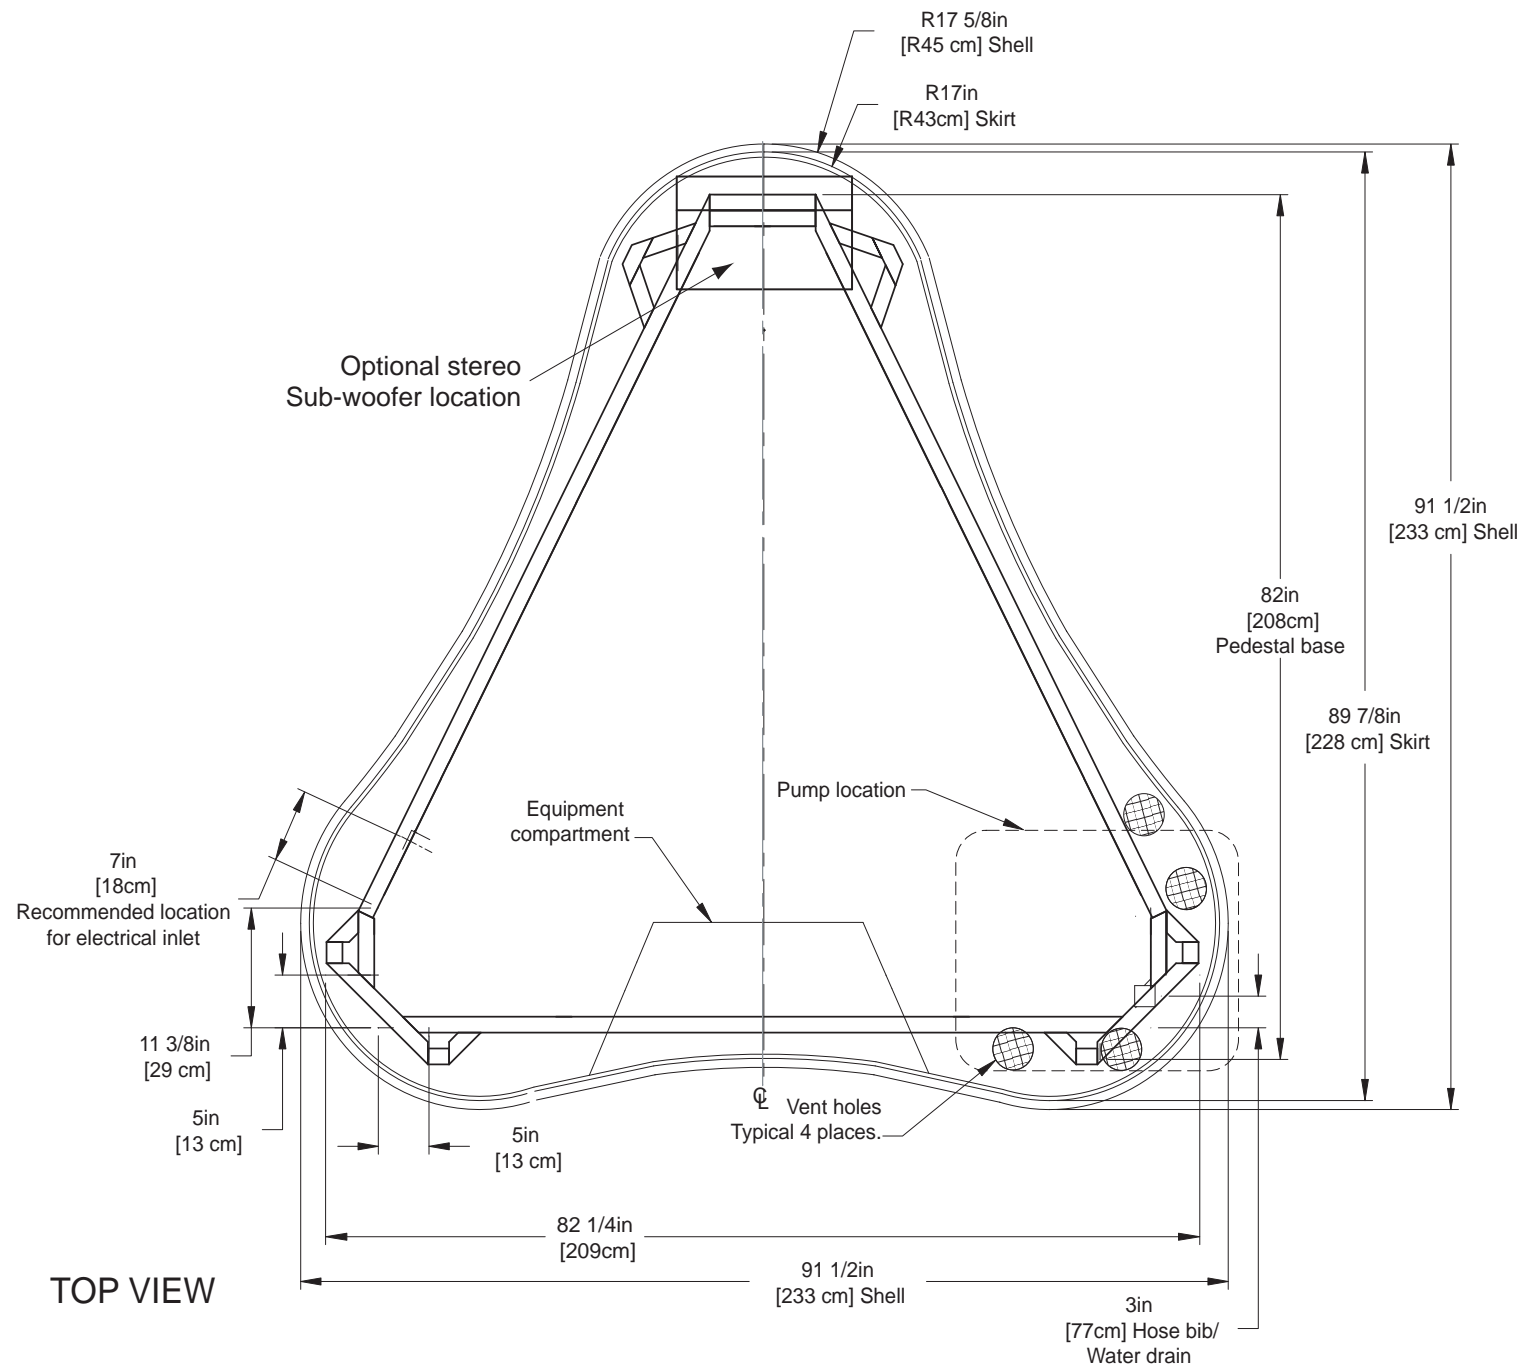


FRONT VIEW

**Caution:**  
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawings above. If site planning is critical to such tolerances, be sure to measure your actual spa.

NOTE: Subject to change without notice

1. Engineering specs may differ slightly from brochure.
2. For E-Z lifter installation allow 18" (45.72cm) clearances on the backside of the spa.
3. Alternative cabinets may add significant weight. Ask your dealer for exact details

# Dupree Bay Plumbing Configuration

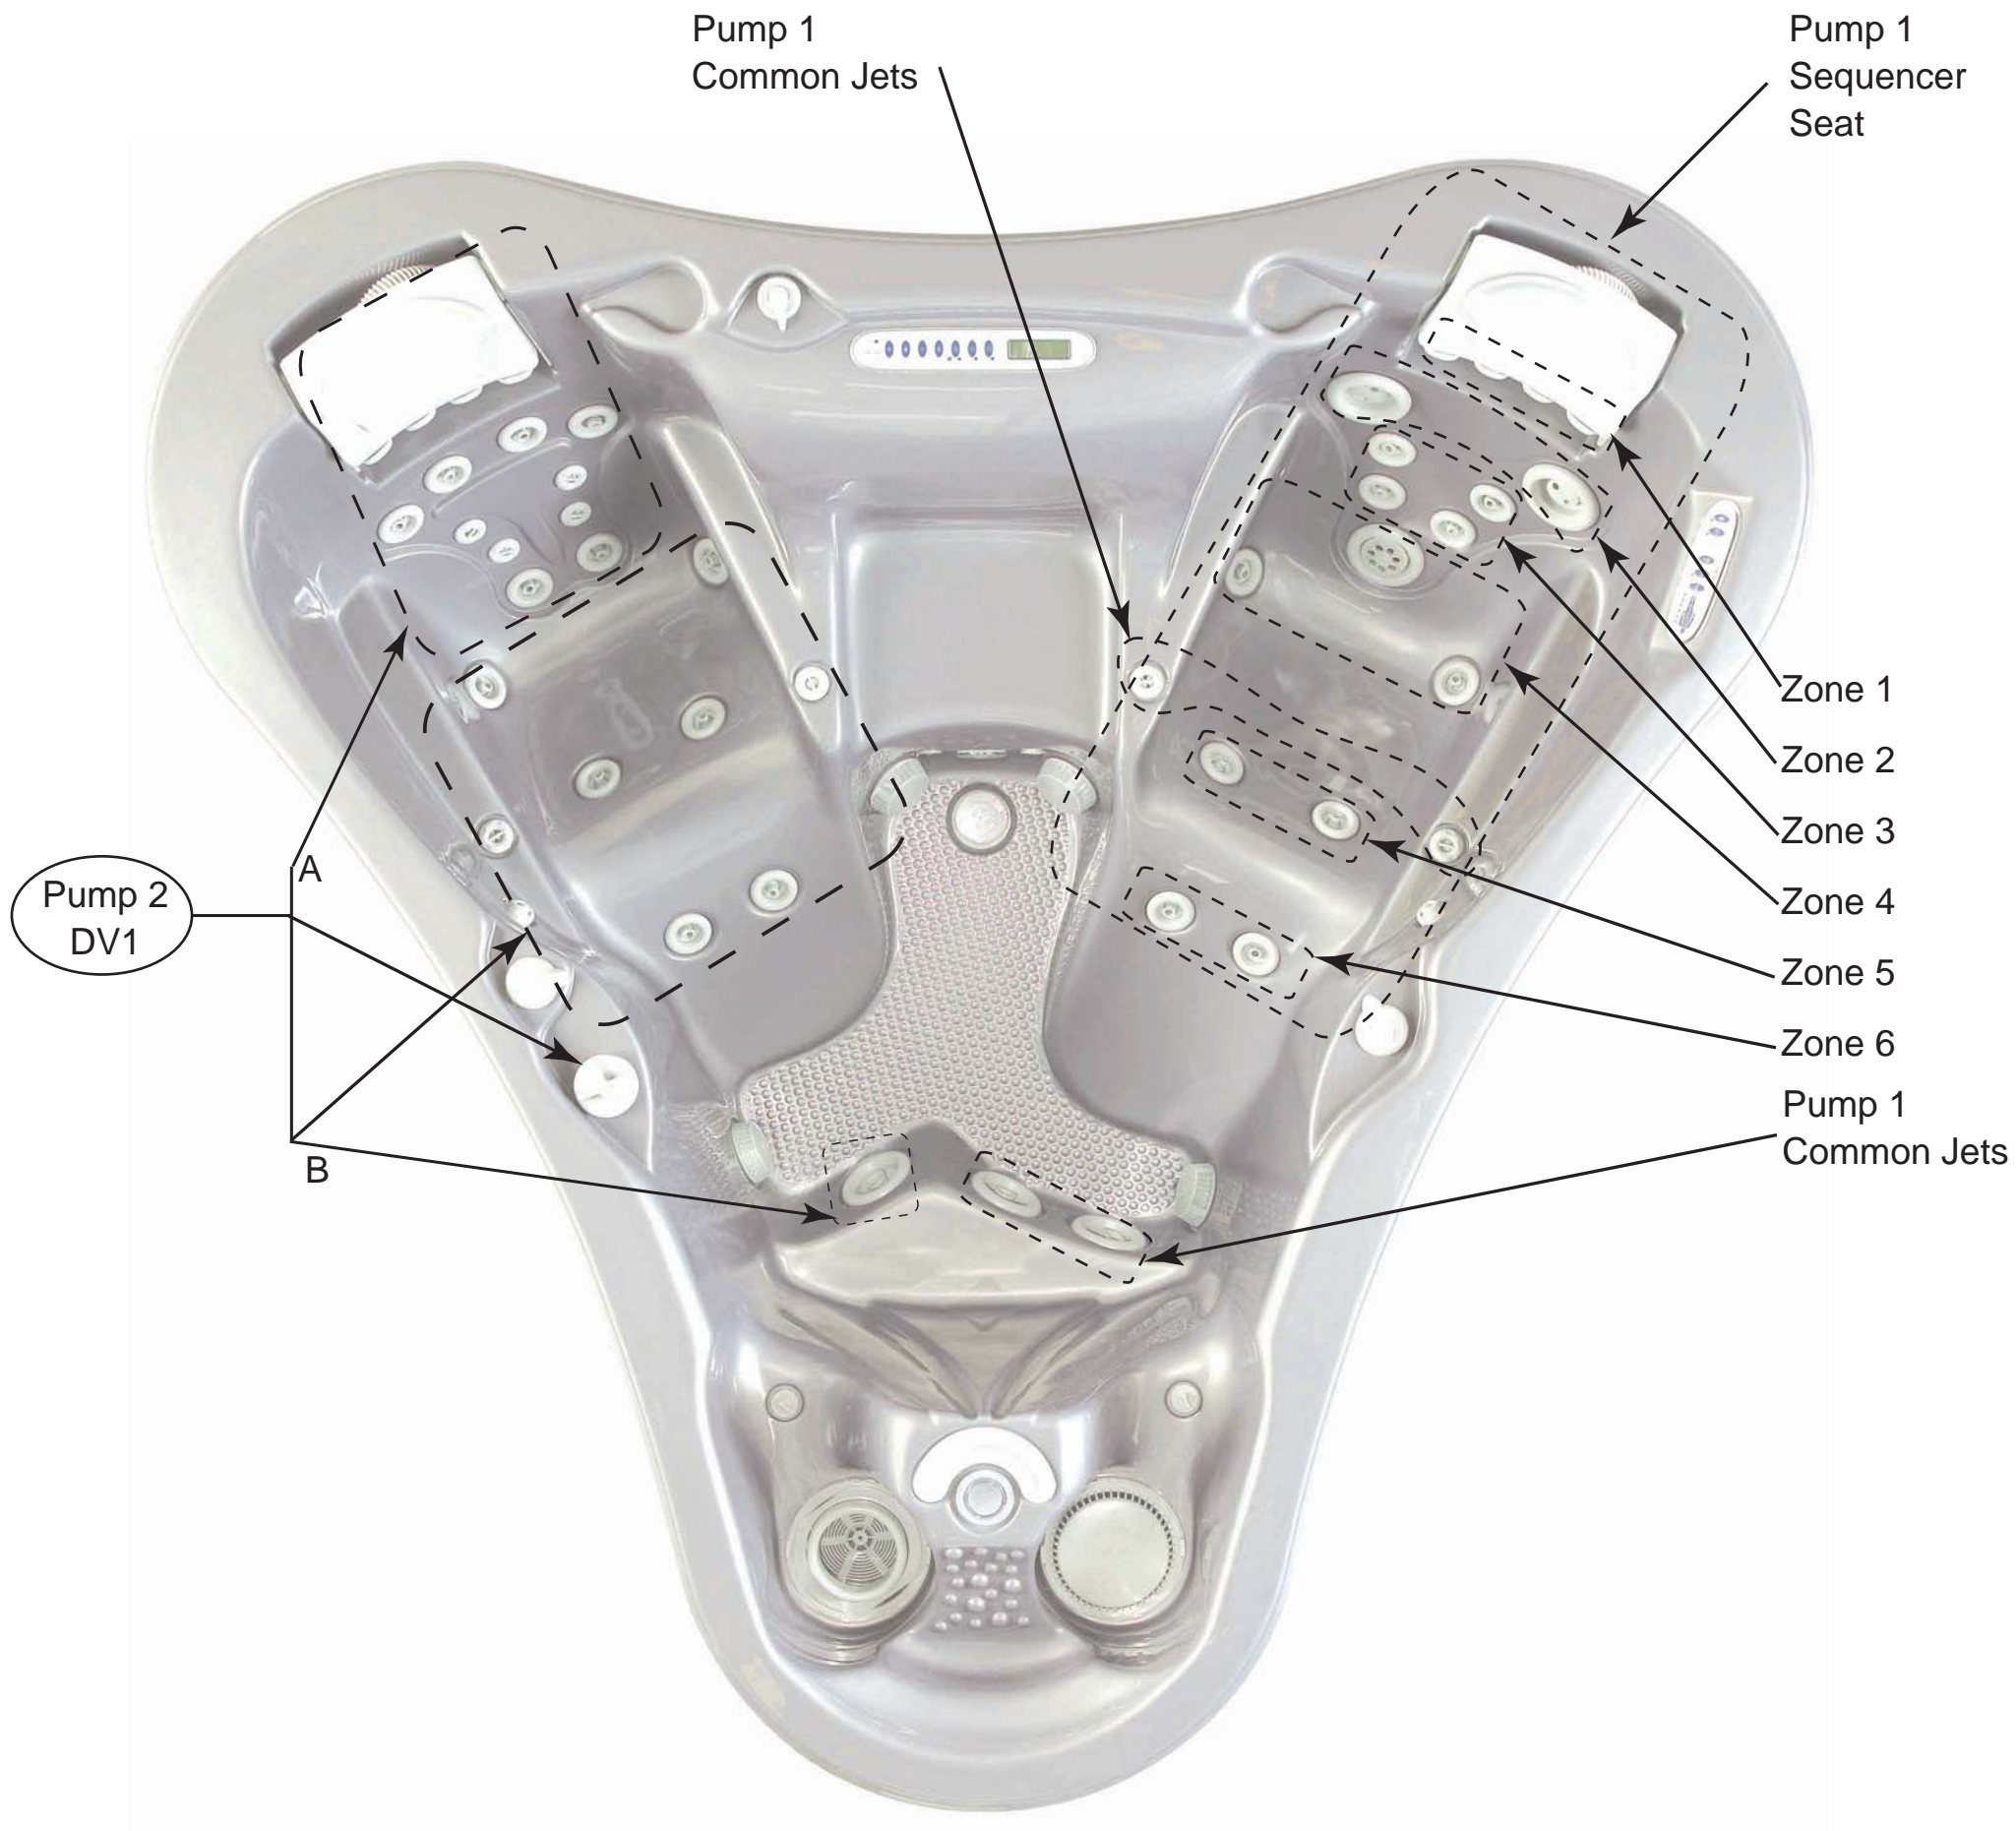


DV1 A = Diverter Valve 1 (A position counter clockwise).  
 DV1 B = Diverter Valve 1 (B position clockwise).  
 DV1 C = Diverter Valve 1 (Neutral position).

**Note:**

1. Subject to change without notice.
2. All drains and skimmer tied in common loop.



# Dupree Bay Jet Insert Designations

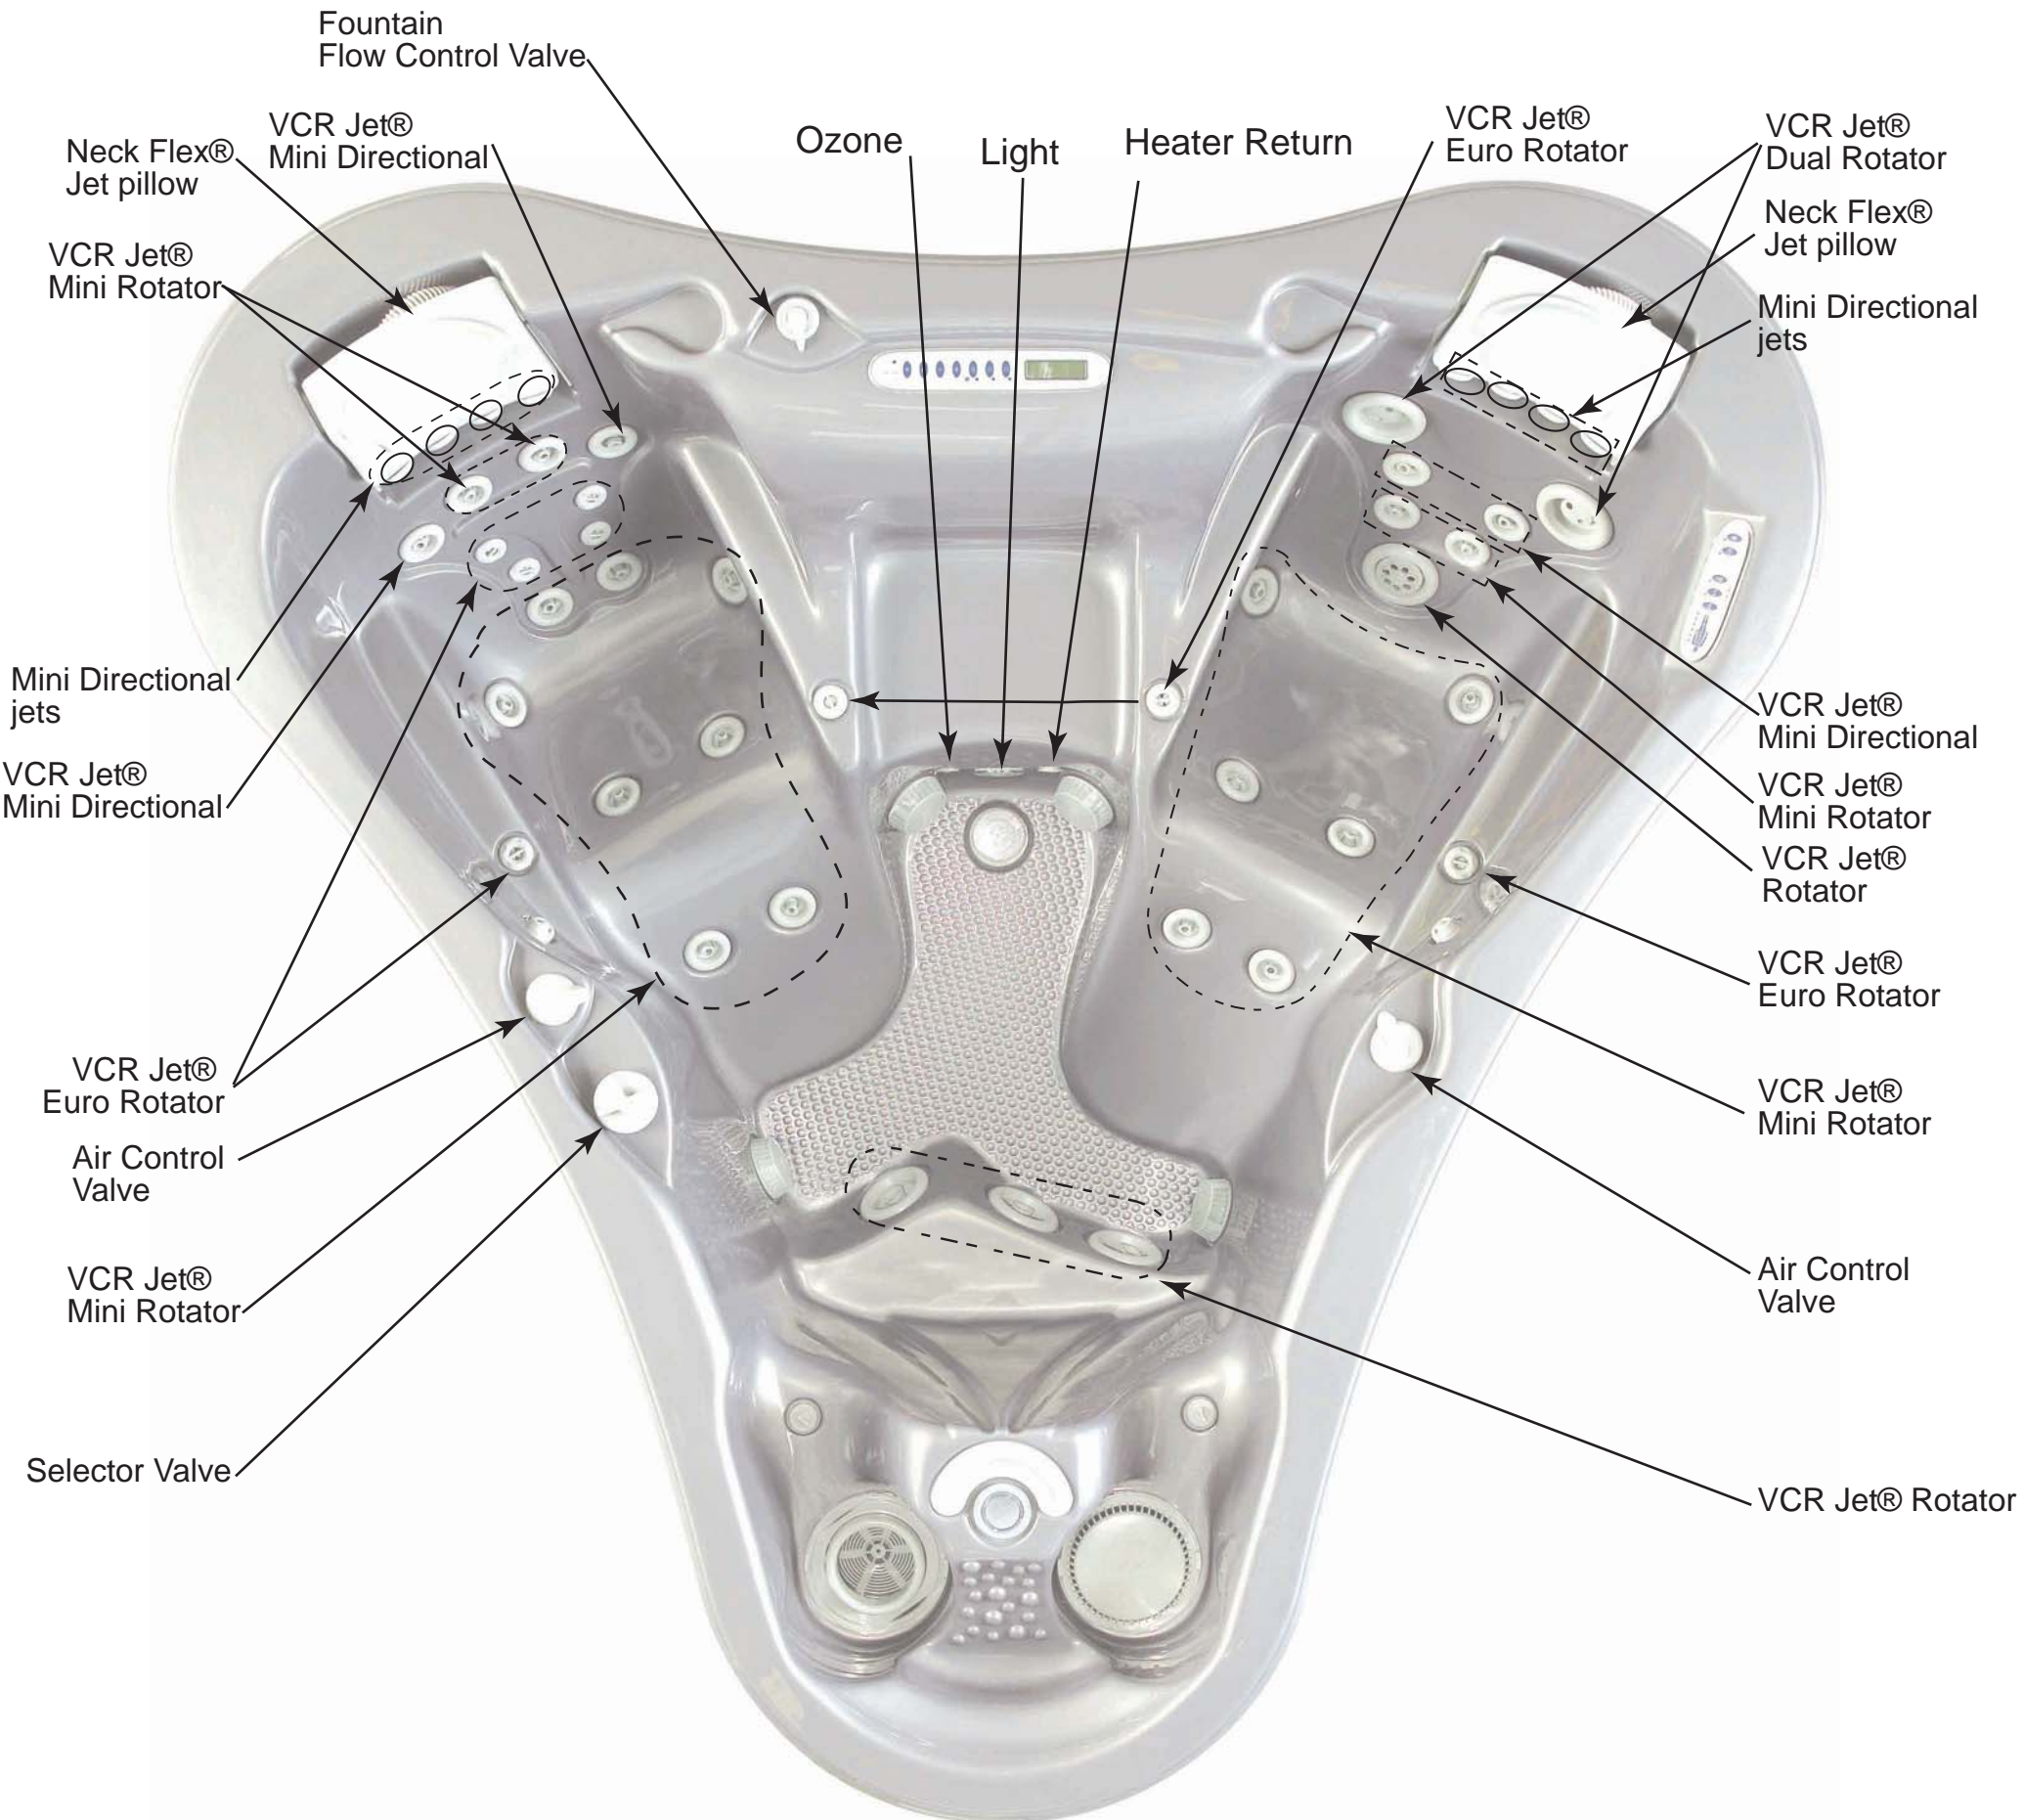

NOTE: Subject to change without notice