

<b>General</b>	
Shape	Square
Seating Capacity	5+
Shell Material	Ultralife™ / Granitex™ / Geloy®
Dimensions	83¼" x 83¼" x 35½" H / (211cm X 211cm x 90cm H)
Corner Radii	16" (41 cm)
Water Capacity	290 Gallons (1098 Liters)
Dry Weight	670 lbs (304 kg)
Shipping Weight	Domestic 670 lbs (304 kg) - Export 721 lbs (327 kg)
Full Weight	3086 lbs (1400 kg)
Skirt Material	Domestic Synthetic - Export Wood or Synthetic
Poly Floor	Yes

<b>Water System</b>	
Water Treatment System	Ultra Pure™
Plumbing Systems	3
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	4
VCR Jet® - Air Adjustable/Directional	6
VCR Jet® - Rotator	4
VCR Jet® - Dual Rotator	4
VCR Jet® - Multi Port Spinner	2
VCR Jet® - Mini Rotator	2
VCR Jet® - Mini Directional	2
VCR Jet® - Euro Directional	4
VCR Jet® - Euro Rotator	2
VCR Jet® - Mini Directional in NFJ	8
Typhoon Jet	1
Ozone Jet	1
Heater Return Jet	1
Pump Returns	4
Diverter Valves	1
Floor Drains	1
Skimmer	8" Weir


<b>Special Features</b>	
Dynamic Massage Sequencer w/ control panel	No
NeckFlex® Jet Pillows	2
Headrest Pillows	1
Stereo system	Optional Poly-Planar
Water Feature	Optional with LFX package
Water Feature Volume control	Optional with LFX package
Cup Holders	2
Tactile Therapy	Foot & hand

<b>Pump Information</b>	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	Two / Dual	Two / single
Circulation pump	1	1
Fountain pump	Optional with LFX package	Optional with LFX package
<b>Electrical System</b>	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Voltage	240	240
Amperage	50/40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	Multi color LED	Multi color LED
Control System	MSPA-MP-D17-NON LFX	MSPA-MP-CE-D17-N/LFX
Upper Control (programmable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	Yes	Yes



Note: 1. Subject to change without notice.


# Aurora Architectural Specification

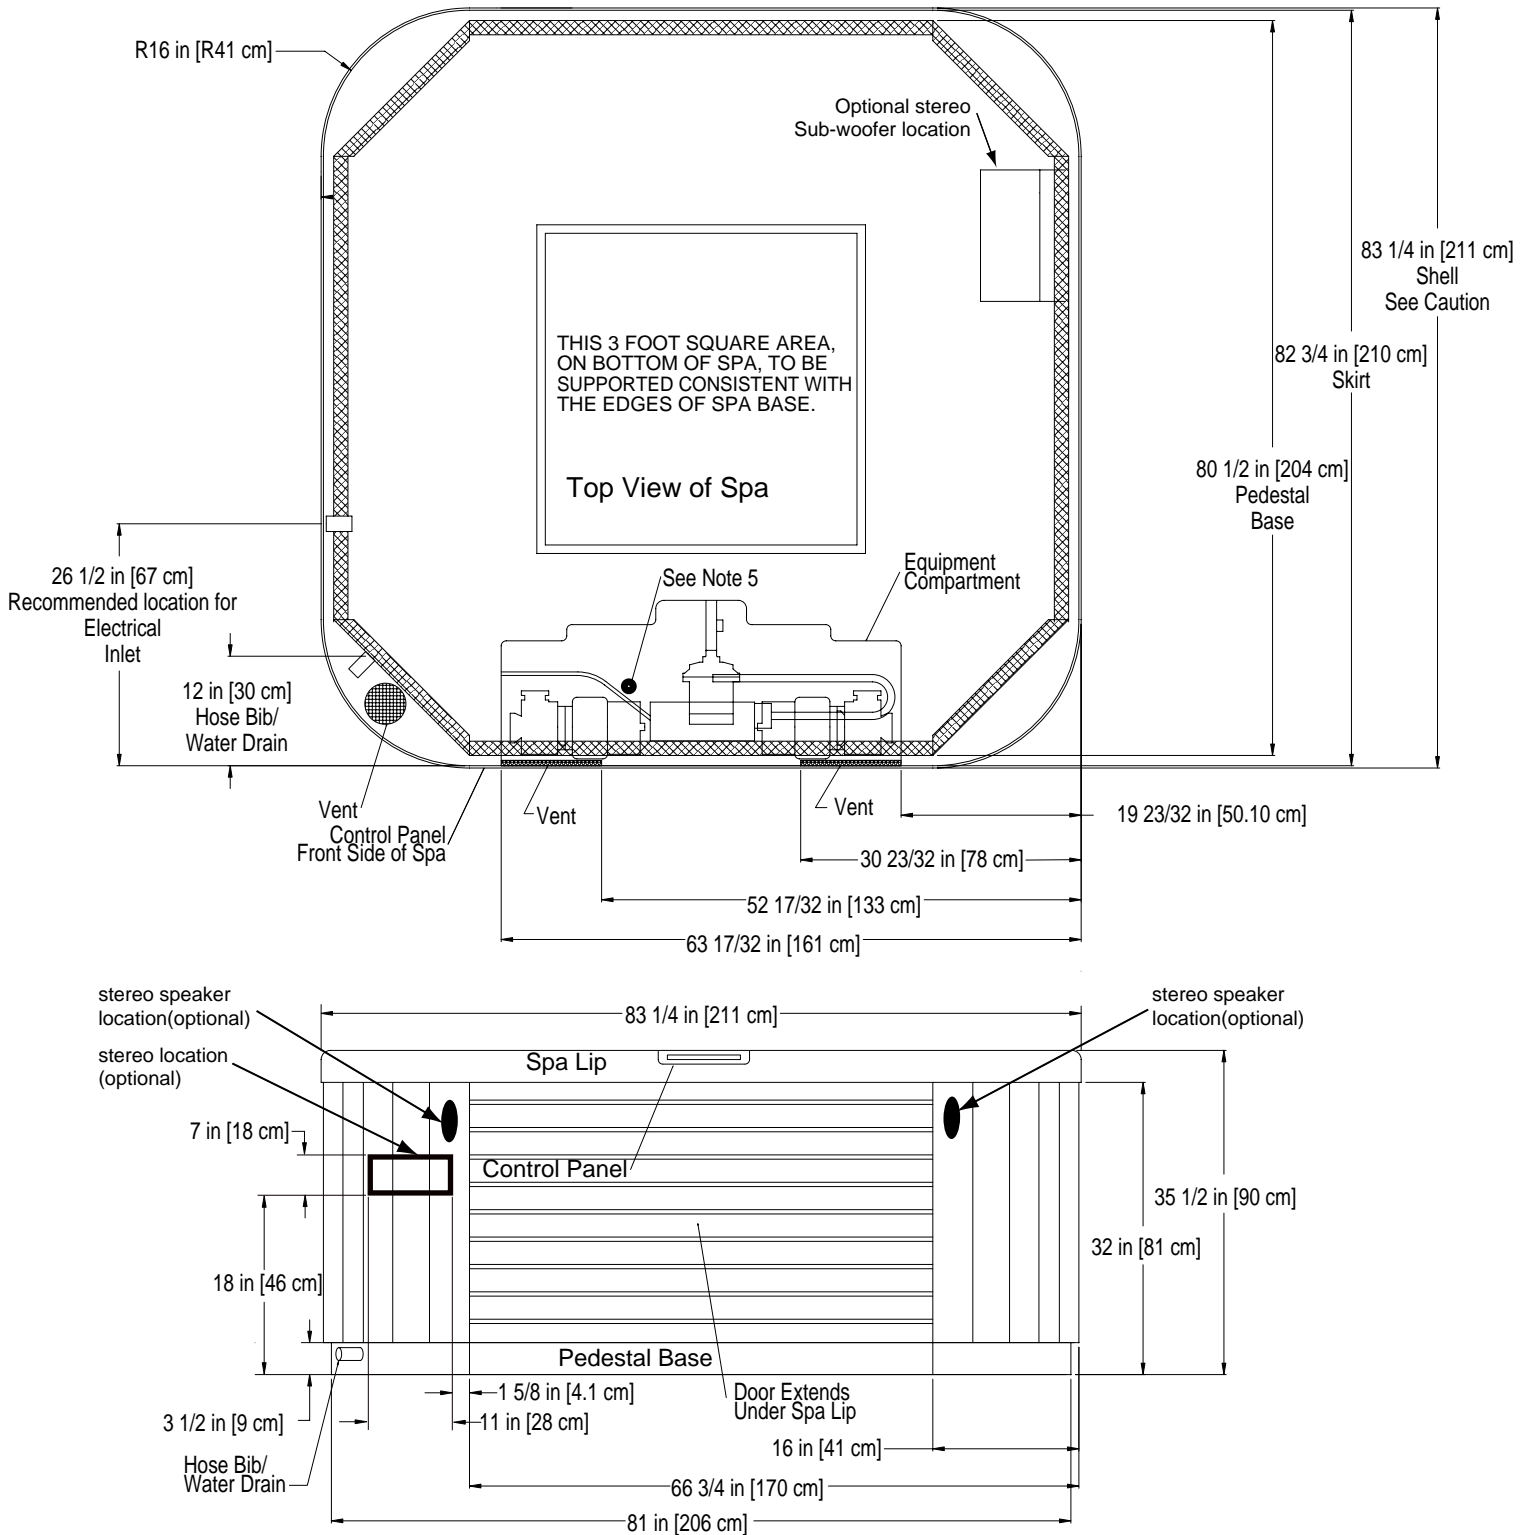

- Note:**
1. Subject to change without notice.
  2. Engineering specs may differ slightly from brochure.
  3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
  4. Alternative cabinets may add significant weight. Ask your dealer for exact details
  5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Run a plumbing line inside the equipment compartment (drill from the inside compartment out)


**Caution:**  
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

## Plumbing Configuration

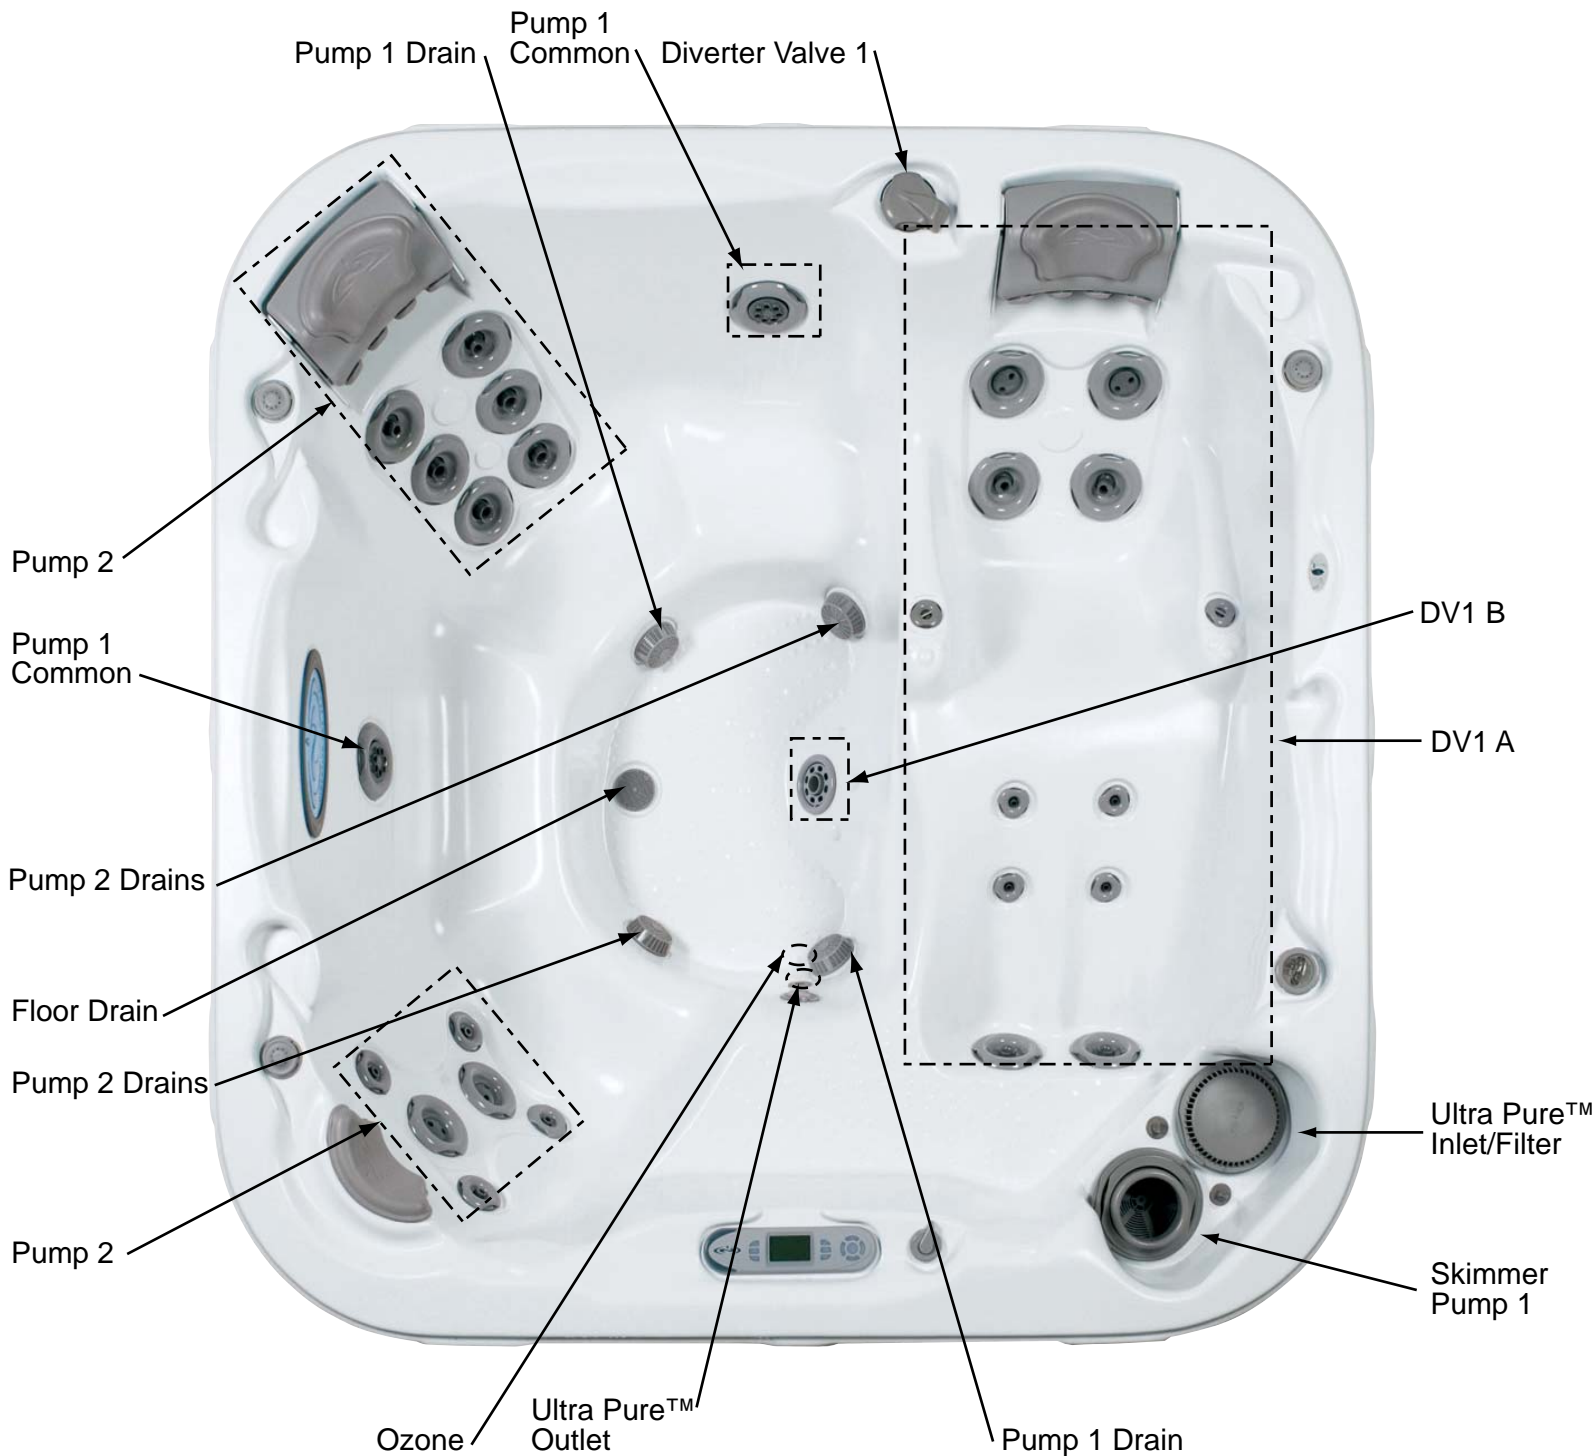

Note: 1. Subject to change without notice.  
 DV1 A = Diverter Valve 1 (A Position Clockwise).  
 DV1 B = Diverter Valve 1 (B Position Counterclockwise).  
 DV1 C = Diverter Valve 1 (Neutral Position).

## Jet Insert Designations

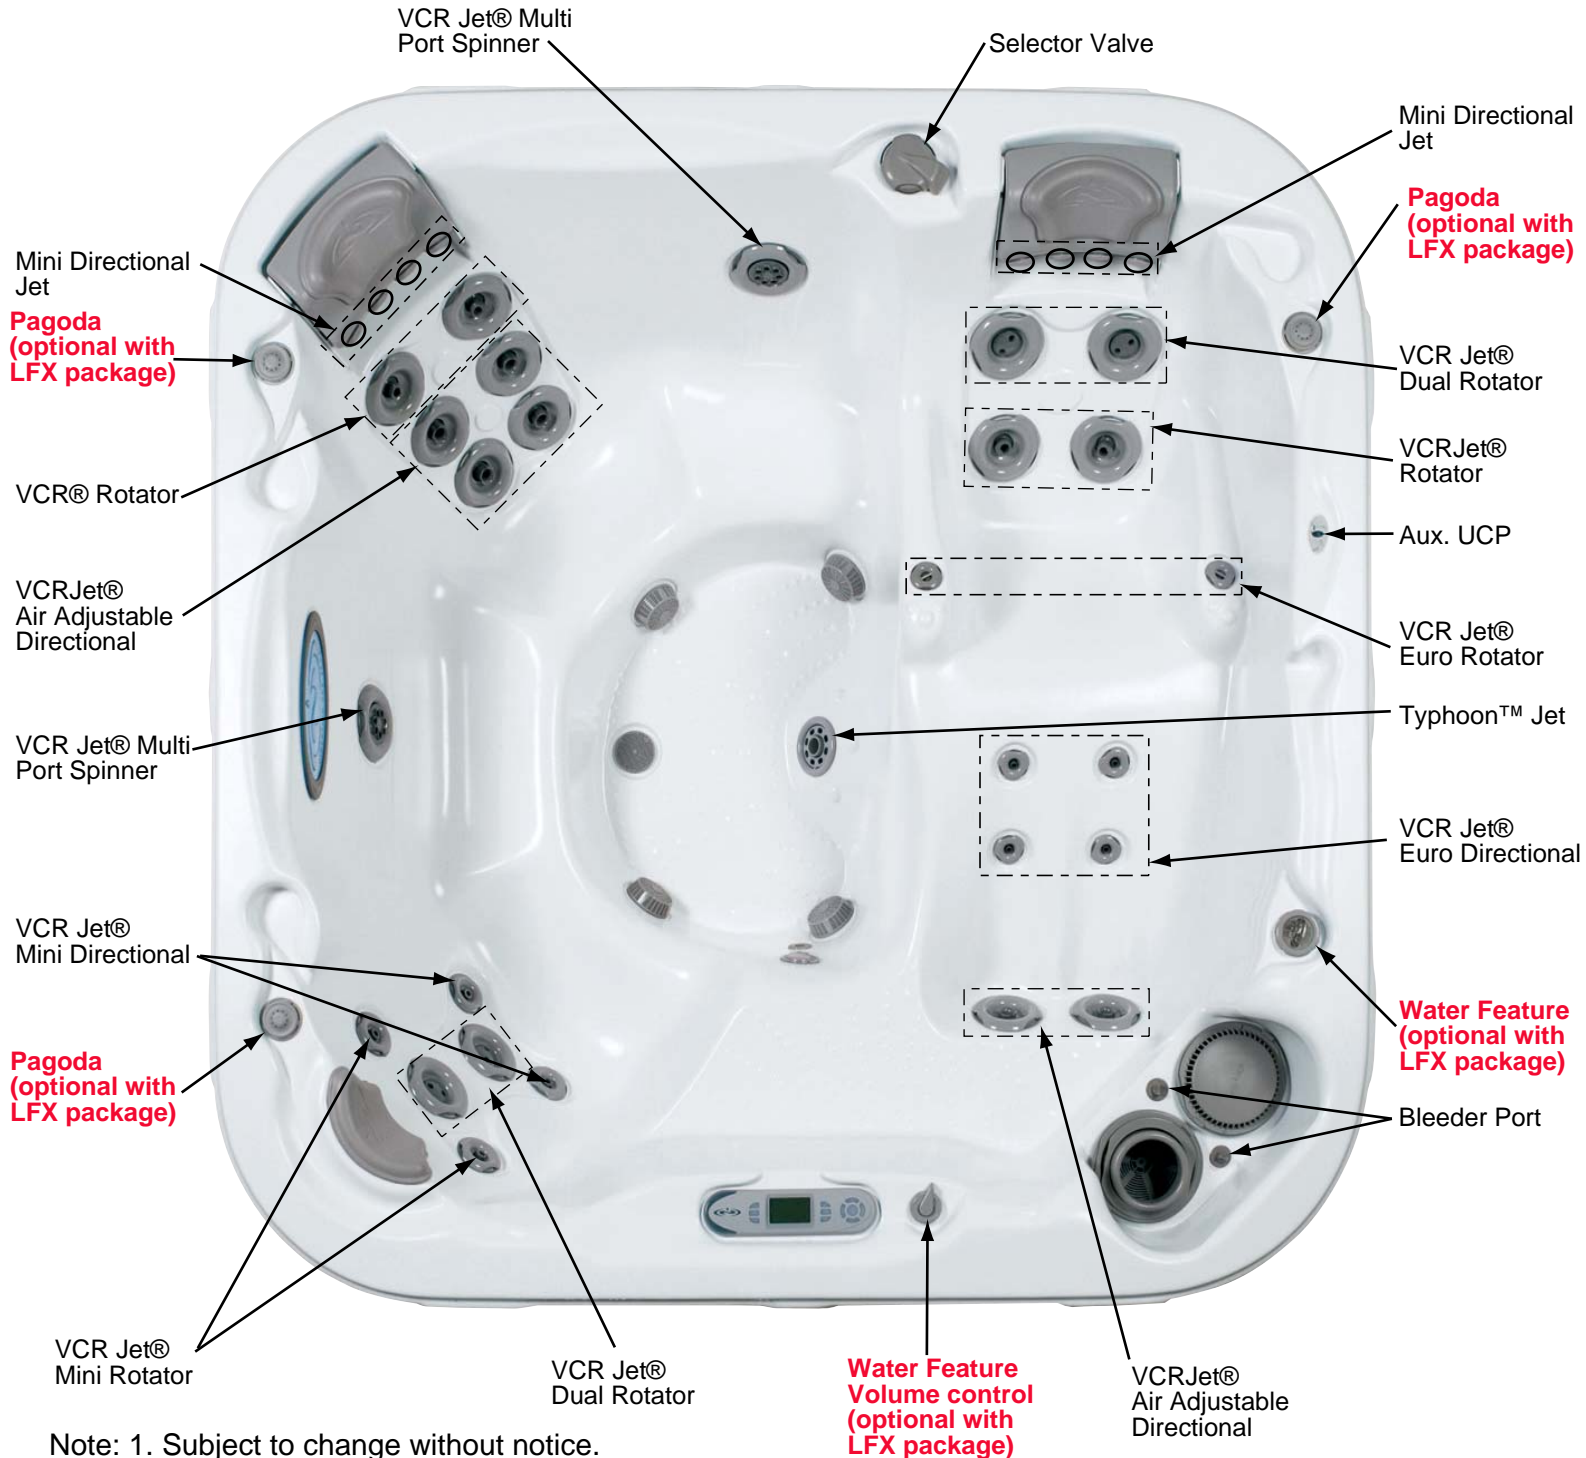

Note: 1. Subject to change without notice.