


General		
Shape	Square	
Seating Capacity	6	
Shell Material	Granitex™ / Acrylic / Ultralife™	
Dimensions	91 1/4" x 91 1/4" x 36" H / (232cm X 232cm x 91cm H)	
Corner Radii	9" (23 cm)	
Water Capacity	385 Gallons (1457 Liters)	
Dry Weight	710 lbs (322 kg)	
Shipping Weight	Domestic 710 lbs (322 kg) / Export 760 lbs (345kg)	
Full Weight	3923 lbs (1779 kg)	
Skirt Material	Synthetic	
ABS Pan	Yes	
Water System		
Water Treatment System	Optional	
Plumbing Systems	4	
Filters/Coverage	1 / 75 sq. ft.	
Gate Valves	0	
Power Storm - Directional	0	
Power Storm - Rifled	1	
Power Storm - Twister	3	
Poly Storm - Rifled	2	
Mini Storm - Directional	11	
Mini Storm - Rifled	6	
Mini Storm - Roto	14	
Cluster Storm - Directional	0	
Cluster Storm - Rifled	3	
VCR Jet® - Mini Directional in NFJ	4	
Ozone Jet	1	
Turbo jet / Diverter Valve	0	
Pump Returns	4	
Diverter Valves	2	
Floor Drains	0	
Skimmer	8" Weir	
Special Features		
Crystal FX	Optional	
NeckFlex® Jet Pillows	2	
Headrest Pillows	1	
Stereo system	Optional	
Water Feature	Standard	
Water Feature Volume control	Standard with water feature	
Cup Holders	4	
Tactile Therapy	Floor	
Pump Information		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Motor Size – Peak (Continuous) HP	4.0 (2.5) HP / 3.6 (2.0) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One Dual & One single	One Dual & One single
Circulation pump	Optional with water treatment system	Optional with water treatment system
Fountain pump	n/a	n/a
Electrical System		
	<b>Domestic (60Hz)</b>	<b>Export (50Hz)</b>
Voltage	240	240
Amperage	40/30	2X16 / 1X32
Heater	4.0 KW	3.0 KW
Thermostat	Electronic	Electronic
Light	Multi color LED	Multi color LED
Control System	SSPA-1-D13	SSPA-1-D13-CE
Upper Control	Programmable Digital	Programmable Digital
Auxiliary Upper Control	No	No
Programmable	Yes	Yes




Note: 1. Subject to change without notice.

# Architectural Specification

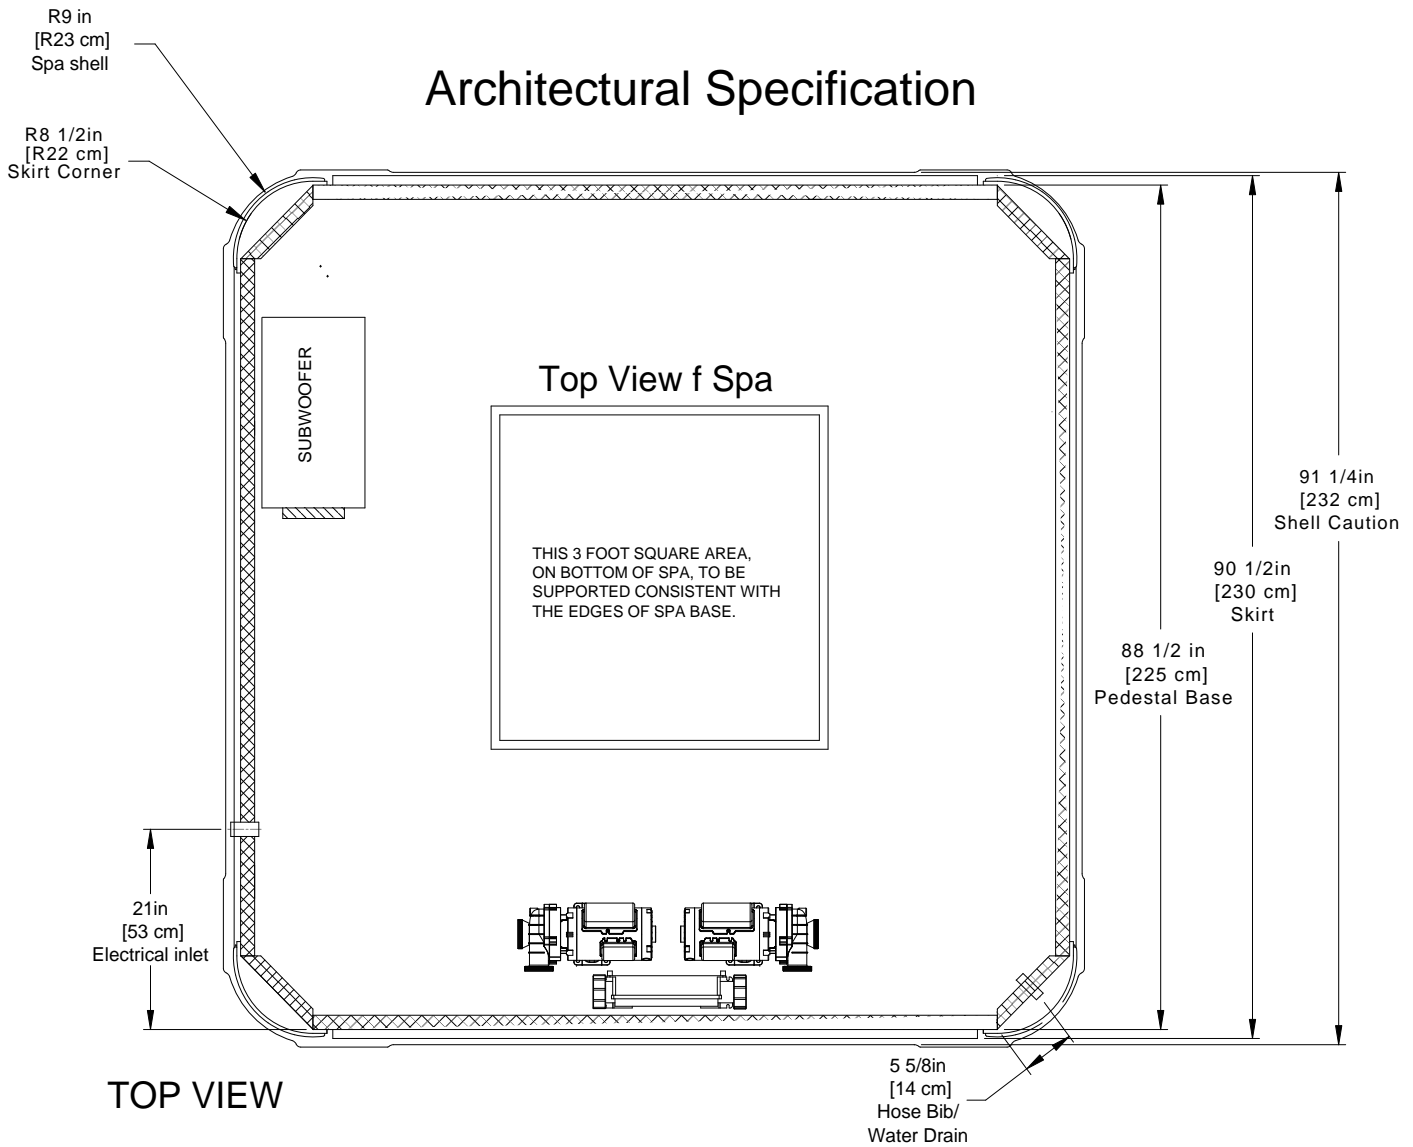

**TOP VIEW**

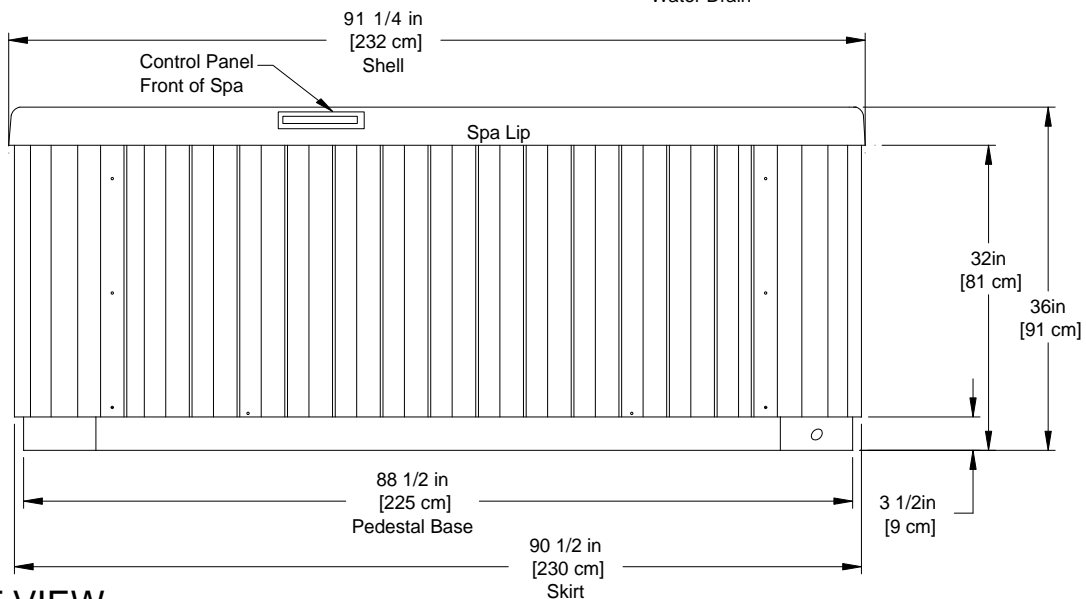


**FRONT VIEW**

**Caution:**  
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

- Notes:**
1. Engineering specs may differ slightly from brochure.
  2. For E-Z lifter installation allow 18" clearances on the backside of the spa.
  3. Alternative cabinets may add significant weight. Ask your dealer for exact details.

# Plumbing Configuration

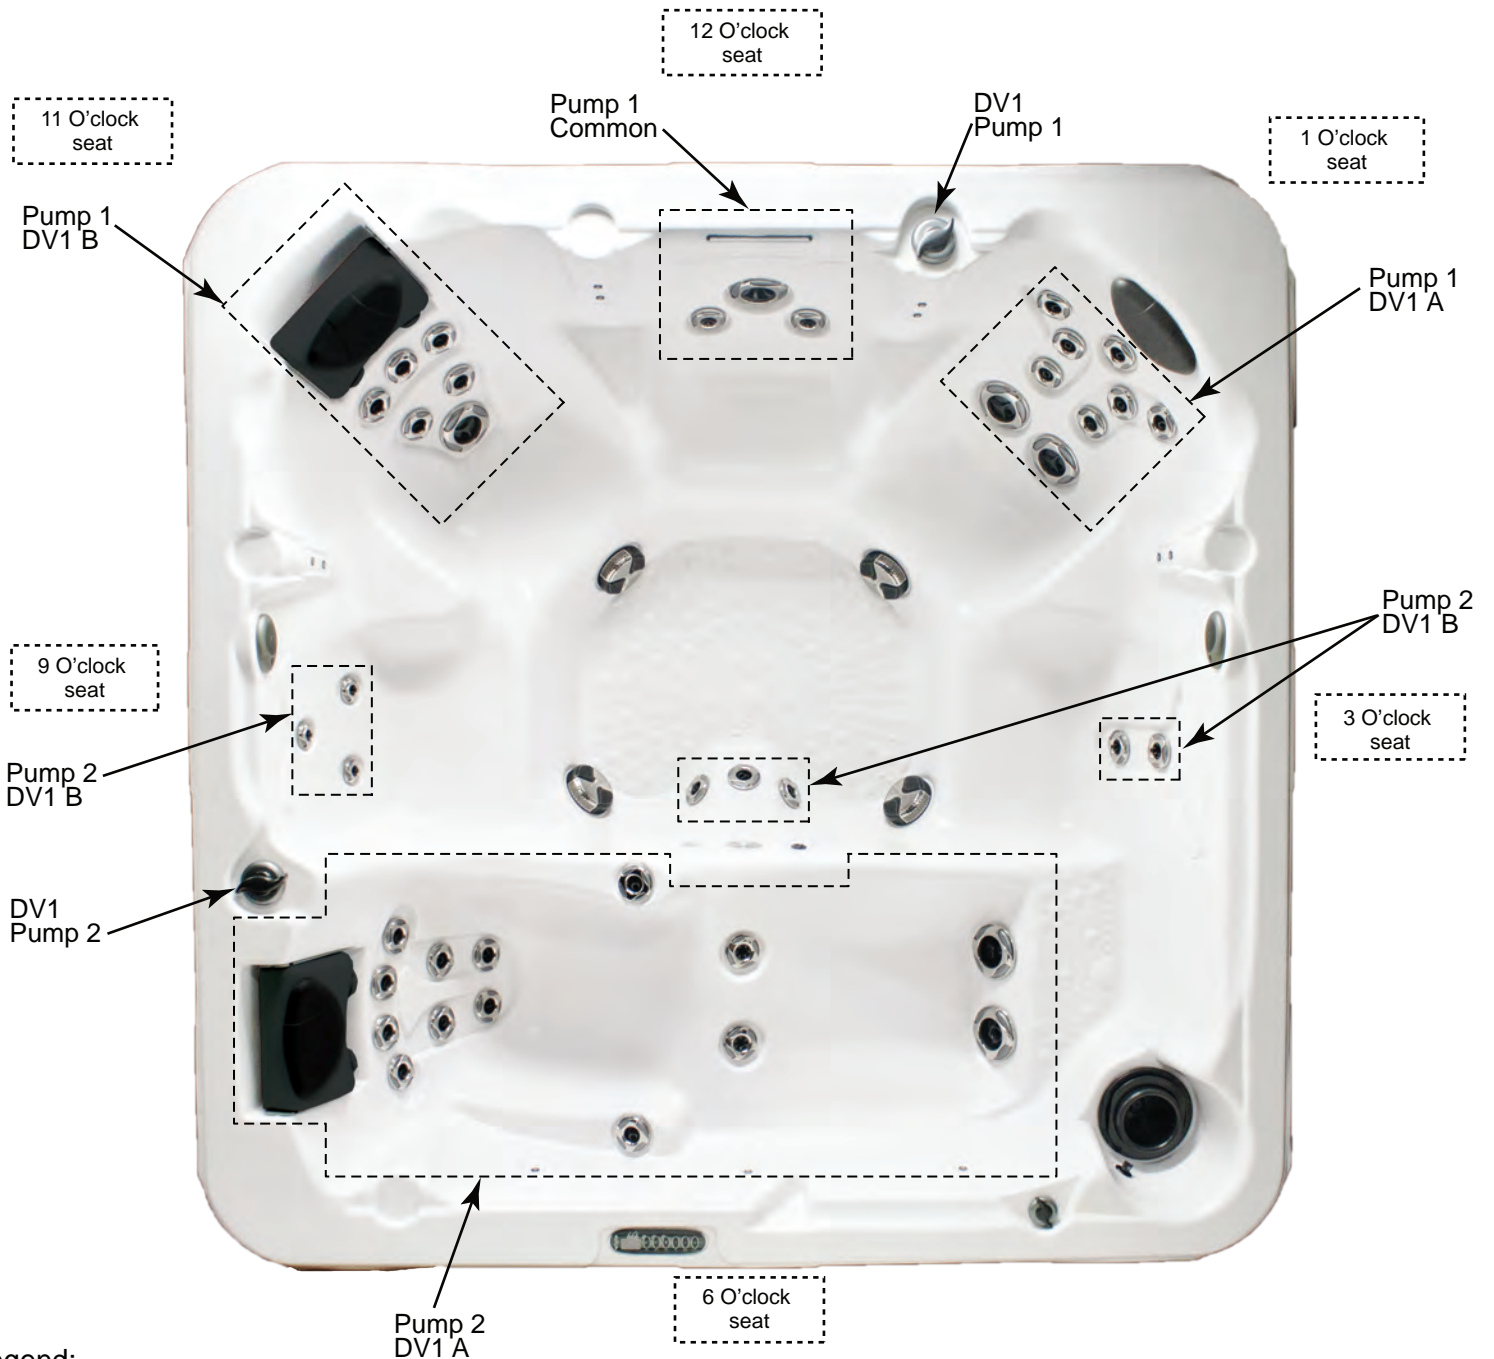



**Legend:**

- DV1 = Diverter Valve 1
- DV1 A = Diverter Valve 1 (A position clockwise).
- DV1 B = Diverter Valve 1 (B position counter clockwise).
- DV1 C = Diverter Valve 1 (C neutral position).
- DV2 = Diverter Valve 2
- DV2 A = Diverter Valve 2 (A position clockwise).
- DV2 B = Diverter Valve 2 (B position counter clockwise).
- DV2 C = Diverter Valve 2 (C neutral position).

Note: Subject to change without notice.

1. All drains and skimmer tied in common loop

# Jet Insert Designation

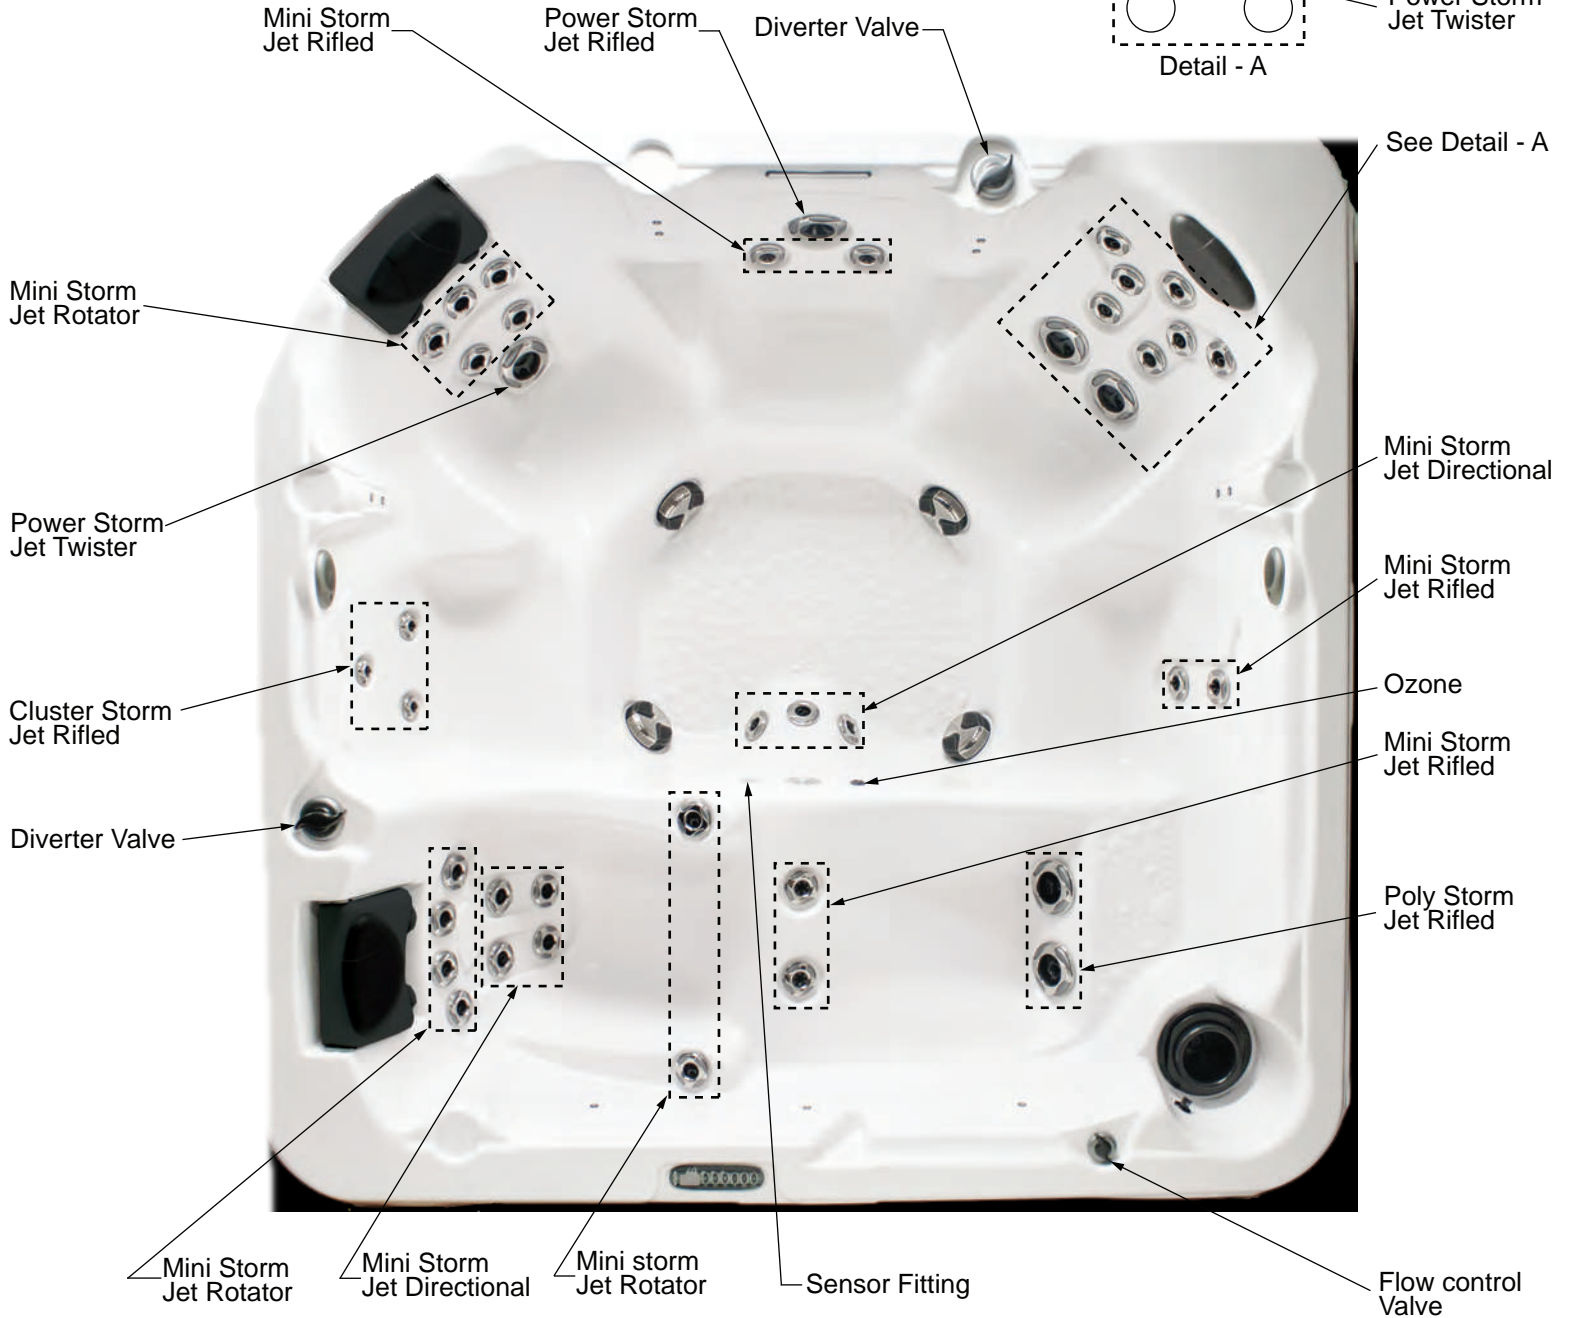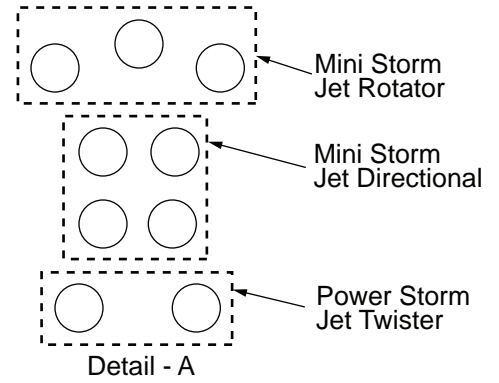

Note: Subject to change without notice.